

# Premium T600 LED Linear High Bay





## Features

- High efficacy of 135 lm/W
- DLC 5.1 Premium qualified
- Low glare Type V distribution
- Available in 2-, 3-, 4- and 5-foot lengths
- IP66 rated, UL wet listed
- Designed for easy cleaning

## Construction

- Heavy duty extruded aluminum chassis for superior thermal control and durability
- Die cast aluminum end caps and extruded polycarbonate lens are gasketed to the housing for protection against the elements
- Diffused lens reduces glare
- Mounting kits included - (2) ceiling anchors and 5' stainless steel aircraft cable kits with adjustable grippers and caribeaner type hooks

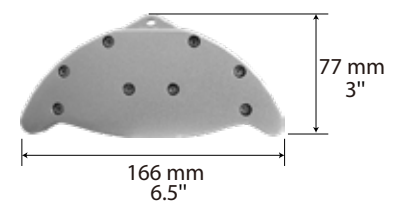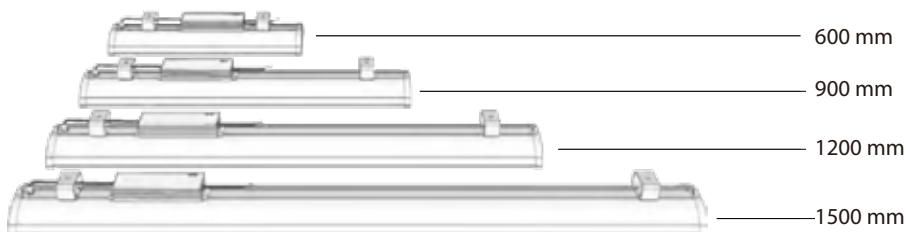

Project:	
Type:	
Catalog#:	

## Description

Premium T600 LED Linear High Bay fixtures are designed to efficiently light any large interior space with 12 to 40 feet height. The IP66 rating and UL wet listing makes them extremely versatile interior LED fixtures. Directly replacing 200 W to 600 W HID high-bays they are ideal for big box retail, warehousing, gymnasiums, ice rinks and manufacturing as well as a variety of specialty applications.

## Specifications

Driver	MEAN WELL driver
Lumen Efficacy	135 lm/W
Wattage	60 W, 80 W, 100 W, 120 W, 160 W, 200 W
CCT	4000K / 5000K
CRI	Ra>80
Input Voltage	100-277 VAC
Operating Temp.	-30°C to 55°C (-22°F to 131°F)
Dimming	1-10V dimmable
Beam Angle	120°
Warranty	5 Years
Certification	CE RoHS SAA FCC cUL UL DLC

## Ordering Information

Model#	Wattage	Lumen	Length	Weight
T6000660W	60 W	8100 lm	60 cm(23.6")	3.6 kg(7.9 lbs)
T6000680W*	80 W	10800 lm	60 cm(23.6")	3.6 kg(7.9 lbs)
T60009100W*	100 W	13500 lm	90 cm(35.4")	5.1 kg(11.2 lbs)
T60009120W	120 W	16200 lm	90 cm(35.4")	5.2 kg(11.5 lbs)
T60012120W*	120 W	16200 lm	120 cm(47.2")	6.5 kg(14.3 lbs)
T60012160W*	160 W	21600 lm	120 cm(47.2")	6.5 kg(14.3 lbs)
T60015200W*	200 W	27000 lm	150 cm(59.1")	7.7 kg(17.0 lbs)

\* UL & DLC listed models